


42 Draft Designs

Double Din Radio Removal Keys – Installation Guidelines

**Do not insert these tools into your radio prior to reading these instructions!
Permanent damage will occur!**

1. Start off using one key. Insert the key gently into the slot with the long portion of the key to the outside of the radio. The notch in the key should always face the inside of the radio.
2. Insert slowly, making sure to keep the long portion of the key pressed against the outside of the slot. You are inserting the key in between the outside bracket and the metal release tab and should feel some tension when the key is halfway in. Insert until the key clicks into place.
3. Once the key has clicked into place, repeat on the remaining 3 slots. Pull straight out gently to release the radio. Yanking or pulling too hard on the radio will bend the fragile release clips.
4. Once the radio is removed, depress the restraint brackets on the side of the radio and remove each key.

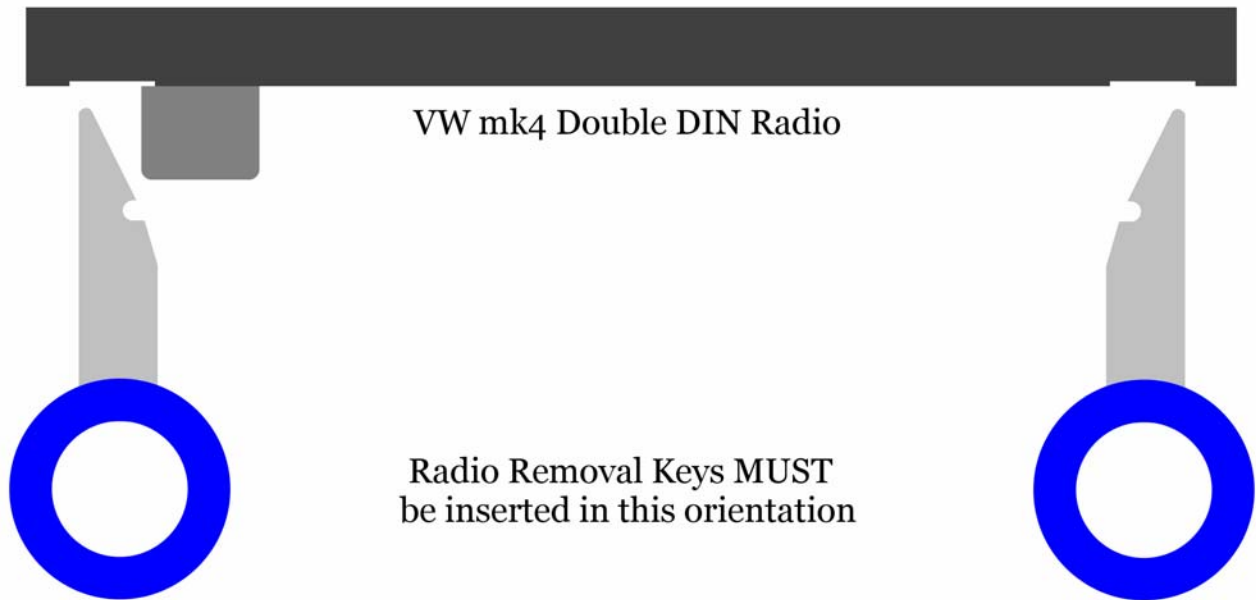

Warning!

Unlike the single DIN VW radios, the restraint system of the double DIN radio is fragile. Inserting the keys the wrong way even once will bend the release tabs and render any removal tools useless. If you have damaged your radio by inserting the keys the wrong way you must take apart the dash until you have access to the side of the radio. To remove the restraint brackets you will have to remove the 4 small silver screws that hold them to the radio. These are located on the side of the radio, 2 screws per side. Reference our website for detailed pictures of the restraint brackets and photos of these removal keys in action.

[Http://www42draftdesigns.com](http://www42draftdesigns.com)